



EP 0 718 049 A2

(11)

EUROPEAN PATENT APPLICATION

(51) Int. Cl.⁶ B07C 3/06, B07C 3/02

(43) Date of publication:
26.06.1996 Bulletin 1996/26

(21) Application number: 95120062.5

(22) Date of filing: 19.12.1995



(19)

Europäisches Patentamt

European Patent Office


Office européen des brevets

<p>(74) Representative: Patentanwälte Beetz - Timpe - Siegfried Schmitt-Fumian - Mayr Steinsdorfstrasse 10 80538 München (DE)</p> <p>(72) Inventors: • Yamashita, Taichiro • Tsuchiura-shi (JP) • Yoshida, Kazushi • Niihara-gun, Ibaraki-ken (JP)</p> <p>(71) Applicant: HITACHI, LTD. Chiyoda-ku, Tokyo 101 (JP)</p> <p>(30) Priority: 22.12.1994 JP 319766/94</p> <p>(84) Designated Contracting States: DE FR GB</p>	<p>(84) Designated Contracting States: DE FR GB</p> <p>(30) Priority: 22.12.1994 JP 319766/94</p> <p>(71) Applicant: HITACHI, LTD. Chiyoda-ku, Tokyo 101 (JP)</p> <p>(72) Inventors: • Yamashita, Taichiro • Tsuchiura-shi (JP) • Yoshida, Kazushi • Niihara-gun, Ibaraki-ken (JP)</p>
--	--

(54) Method and apparatus for sorting paper sheets or the like

(57) A small-size apparatus for sorting sheets or the like can form a delivery route by repeating sorting operation and prevent an overflow of sheets or the like. To this end, auxiliary sorting compartments are provided in accumulating means (11) in the sorting operation for the first time, and when an overflow occurs, the allocated sorting compartments are shifted each by one compartment to the side of the auxiliary sorting compartment. In the first-time sorting operation, destination codes 15 and

FIG.1

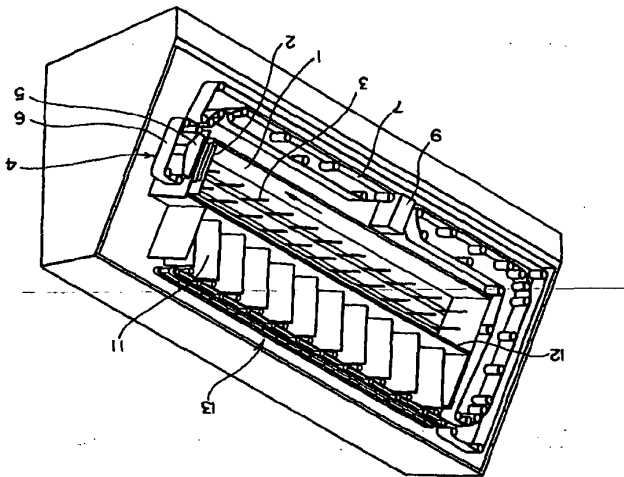

BACKGROUND OF THE INVENTION

The present invention relates to a method and an apparatus of sorting sheets or the like for reading destination codes in bar codes, for example, provided on paper sheets or the like, such as postal matter, and classifying the thrown-in sheets or the like according to destination codes, and more particularly to a method and an apparatus of sorting sheets or the like, which are capable of forming a delivery route of postal matter by sequencing the postal matter in the order of delivery according to destinations.

A system for sorting sheets or the like for delivery disclosed in JP-A-63-287584 is one of the apparatus for sequencing the thrown-in sheets or the like in the order specified by destination codes.

This conventional technique inputs delivery destinations of sheets or the like and sorts them into destination districts according to the inputted delivery destinations. In this sorting process, the destinations and the numbers of sheets or the like are stored in memory sorted into the destination districts. Then, the destinations are sequenced or rearranged in the order of delivery, and again stored in memory. Subsequently, the sheets sorted into the destination districts are taken out once, and sent to the supply means and the delivery destinations are read again, and by collating with the destinations arranged in the order of delivery in the memory, the sheets are sorted in the order of delivery.

In the above-mentioned prior art, when forming a delivery route, it is necessary to take out the sheets or the like such as mails classified once in the sorter, and bring them back to the supply means without changing their order. To this end, the sorted sheets or the like are transported from the sorter to the supply means. In this method, in order to supply the sheets sorted and accumulated in the sorter back to the supply means, the sheets need to be moved for three to six meters from the sorter to the supply means.

SUMMARY OF THE INVENTION

Supposing that the number of mails for a mailman is about 1000, the weight of mails amount to about 10 kg in total, and therefore it is necessary to provide a mail basket in the vicinity of the sorter, for example, put the mails into the basket taking care so as not to disrupt their order, and move the basket to the vicinity of the supply means, and supply the mails sequentially. This work is troublesome, and what is worse, if any mistake is made about the order of the mails when putting in and taking out of the basket, a delivery route cannot be formed correctly.

The object of the present invention is to provide an apparatus for sorting sheets or the like, which is capable of improving the efficiency of forming the delivery route of sorted mails, and to provide a small-size apparatus which can be installed in a small post office.

In order to achieve the above object, the method for sorting sheets or the like according to the present invention uses any of the following arrangements:

- (1) A method for sorting sheets or the like comprising the steps of:
 - separating, by separating means, a sheet or the like from a plurality of sheets or the like supplied from supply means holding the sheets or the like in upright position, and sending the sheet or the like;
 - after the sheet or the like is transferred, reading a destination code of the sheet or the like by destination code reading means for reading the destination code previously attached to the sheet or the like, and storing the destination code in a first memory unit;
 - storing in a second memory unit a sorting setting showing correspondence between the destination codes and a plurality of sorting compartments in accumulating means;
 - classifying and throwing the sheet or the like into one of the sorting compartments of the accumulating means according to the destination code;
 - performing a series of sorting steps of sequentially sorting and accumulating according to the sorting setting the sheets or the like in upright position into the plurality of sorting compartments of the accumulating means, located above and adjacent to the supply means;
 - after the sorting operation, moving the accumulated sheets or the like from the accumulating means again to the feed means;
 - subsequently, rearranging or sequencing the sheets or the like in a specified order according to the destination codes by repeating the sorting operation;
 - determining a sorting setting showing correspondence between destination codes in the sorting operation for a second time and beyond and the sorting compartments by using the destination codes stored in the sorting operation for a first time, and storing the sorting setting in the second memory unit; and
 - performing the sorting operation for the second time and beyond according to the sorting setting stored in the second memory unit.

In this case, it is effective if the above-mentioned sorting method further comprises the steps of providing an auxiliary sorting compartment adjacent to the sorting compartment and abnormally detecting means for detecting an abnormally signal when any sorting compartment becomes unable to accumulate the sheets or the like; stopping sorting and throwing the sheets or the like into allocated sorting compartments when the abnormally signal is detected during the sorting operation for the first time;

changing the sorting setting, which has been allocated to all the sorting compartments from a sorting compartment closest to the auxiliary sorting compartment to a sorting compartment where the abnormally signal was detected, and then allocating the changed sorting setting to all the sorting compartments from the auxiliary sorting compartment to a sorting compartment adjacent on the auxiliary sorting compartment to the sorting compartment where the abnormally signal was detected, and storing the changed sorting setting in the second memory unit; and continuing the sorting operation according to the sorting setting stored in the second memory unit.

In this case, the sorting method should preferably be such that the sorting setting is set to a plurality of the auxiliary sorting compartments and also provide a plurality of sorting compartments between the auxiliary sorting compartments, and the sorting method should preferably further comprises the steps of selecting one of a plurality of groups of destination codes, and providing sorting information inputting means for inputting a specified sequential order previously determined for each group of destination codes and also inputting the sorting setting, wherein the way in which the auxiliary sorting compartments and the sorting compartments are arranged in the sorting setting differs with the different groups of destination codes.

(2) A method and an apparatus for sorting sheets or the like comprising the steps of:

separating by separating means a sheet or the like from a plurality of sheets or the like supplied from supply means holding the sheets or the like in upright position, and transferring the sheet or the like;

after the sheet or the like is transferred, reading a destination code of the sheet or the like by destination code reading means for reading the destination code previously attached to the sheet or the like, and storing the destination code in a first memory unit;

storing in a second memory unit a sorting setting showing correspondence between the destination codes and a plurality of sorting compartments in accumulating means;

classifying and throwing the sheet or the like into one of the sorting compartments of the accumulating means according to the destination code;

performing a series of sorting steps of sequentially sorting and accumulating the sheets or the like in upright position into the plurality of sorting compartments of the accumulating means, located above and adjacent to the supply means, according to the sorting setting;

after the sorting operation, moving the accumulated sheets or the like from the accumulating means again to the feed means;

subsequently, sequencing the sheets or the like in a specified order according to the destination codes by repeating the sorting operation;

storing in a third memory unit the number of sheets or the like to be sorted and thrown into each of the sorting compartments in a third memory unit;

obtaining the number of the sheets or the like sorted and thrown into each sorting compartment in a sorting operation for a second time from the destination codes stored in the first memory unit in the sorting operation for a first time, and storing the obtained number of the sheets or the like in the third memory unit;

arranging the sorting setting so as to allocate a plurality of consecutive sorting compartments to accommodate the number of sheets or the like as applicable sorting compartments when the number of sheets or the like exceeds a specified value in any of the sorting compartments, and storing the sorting setting in the second memory unit; and

performing the sorting operation for the second time and beyond according to the sorting setting.

In this case, the sorting method should preferably be such that when the set number of sorting compartments is greater than the total number of sorting compartments provided in the accumulating means, in the sorting setting provided such that a plurality of sorting compartments are allocated because the number of sheets or the like stored in the third memory unit is greater than a specified number, the sorting setting is changed so that the set number of sorting compartments is smaller than or equal to the total number of sorting compartments by reducing the allocated sorting compartments by sequentially selecting the sorting compartments with smaller excess numbers of sheets or the like over the specified number.

(3) A method and an apparatus for sorting sheets or the like comprising the steps of:

separating by separating means a sheet or the like from a plurality of sheets or the like supplied from supply means holding the sheets or the like in upright position, and transferring the sheet or the like;

after the sheet or the like is transferred, reading a destination code of the sheet or the like by destination code reading means for reading the destination code previously attached to the sheet or the like, and storing the destination code in a first memory unit;

storing in a second memory unit a sorting setting showing correspondence between the destination codes

and a plurality of sorting compartments in accumulating means; classifying and throwing the sheet or the like into one sorting compartment of the accumulating means according to the destination code; performing a series of sorting steps of sequentially sorting and accumulating the sheets or the like in upright position into the plurality of sorting compartments of the accumulating means, located above and adjacent to the supply means, according to the sorting setting; after the sorting operation, moving the accumulated sheets or the like from the accumulating means again to the feed means; subsequently, sequencing the sheets or the like in a specified order according to the destination codes by repeating the sorting operation; measuring a thickness of sheets or the like by thickness measuring means located midway through sheets-or-the-like transfer means connecting the separating means and accumulating means; storing in the first memory the destination codes and thicknesses of sheets or the like associated with the codes; storing in a third memory the destination codes and thicknesses of the sheets or the like sorted into each sorting compartment; obtaining the destination codes and thicknesses of the sheets or the like, sorted into each sorting compartment in sorting operation for the second time, from the destination codes and thicknesses stored in the first memory unit in sorting operation for the first time, and storing the destination codes and thicknesses in the third memory; when a total thickness of sheets or the like exceeds a specified thickness in any sorting compartment, arranging the like of the thickness are allocated as applicable sorting compartments, and storing the sorting setting in the second memory unit; and performing the sorting operation for the second time and beyond according to the sorting setting.

25 In this case, the sorting method should preferably be such that if the sorting setting is provided such that a plurality of sorting compartments are allocated because a total of the thicknesses of sheets or the like stored in the third memory unit exceeds a specified thickness, when the set number of sorting compartments is greater than the total number of sorting compartments provided in the accumulating means, the sorting setting is arranged so that the set number of sorting compartments is greater than or equal to a total number of the sorting compartments with smaller excess numbers over the specified thickness, and then the sorting operation for the second time and beyond are performed. The sorting method should be effective if it further comprises the steps of:

30 providing, in an apparatus for sorting sheets or the like, sequencing means for sequencing the destination codes stored in the third memory unit and a fourth memory unit for storing destination codes of sheets or the like to be rejected; deciding sheets or the like to be rejected in the descending order of thickness until the number of the set sorting compartments becomes smaller than or equal to a total number of the sorting compartments in the accumulating means; storing in the fourth memory unit the destination codes of the sheets or the like to be rejected, and then performing the sorting operation for the second time and beyond;

40 when a destination code read by the destination code reading means is stored in the fourth memory unit, rejecting that sheet or the like. The sorting method should preferably be such that the thickness measuring means measures the length of the sheets or the like midway through the transfer means, and specifies predetermined thicknesses corresponding to measured lengths.

45 In any of the above aspects (1) to (3), it is effective if the sheets or the like sorted and accumulated in the accumulating means are moved to the supply means while keeping their order unchanged, and they are again separated one by one by the separating means.

BRIEF DESCRIPTION OF THE DRAWINGS

50 Fig. 1 is a perspective view showing an embodiment of the apparatus for sorting sheets or the like according to the present invention;

55 Fig. 2 is a diagram showing an example of composition of a destination code and a destination code reading means, in cross sectional view, which is a component of an apparatus for sorting sheets or the like according to the present invention;

Fig. 3 is a front view showing an example of the structure of accumulating means and classifying means, which are components of an apparatus for sorting sheets or the like according to the present invention;

Fig. 4 is a schematic diagram showing the structure of the embodiment of the apparatus for sorting sheets or the like according to the present invention;

Fig. 6 is a block diagram showing the structure of the apparatus for sorting sheets or the like according to the present invention;

Fig. 8 is an explanatory diagram showing another example of the delivery route sequencing operation in the apparatus for sorting sheets or the like according to the present invention.

For the first time, a new type of sorting sheet has been developed, which is made of a special material that can be used for sorting sheets or for the present invention.

apparatus for sorting sheets or the like according to the present invention;

sorting sheets or the like according to the present invention;
Fig. 15 is an explanatory diagram showing another example of the sorting operation for the first time in the apparatus

Fig. 17 is a flowchart showing an example of the sorting operation in the apparatus for sorting sheets or the like

Fig. 19 is a flowchart showing yet another example of the sorting operation in the apparatus for sorting sheets or

Embodiments of the present invention will be described with reference to the accompanying drawings.

Separating means 4 can separate only a sheet at the right end (on the drawing) out of the sheets or the like 2 placed

and is characterized by having a rotating shaft 6 by a magnetic process or a mechanical one, and the chucking belt 6 by drive means such as an electric motor.

Information codes may be bar codes, printed numbers and characters, or handwritten numbers and characters, in other words, codes which can be read by the reading means 9.

ed into a plurality of sorting compartments, which are so formed as to hold the sheets or the like 2 in the same position as they are in the supply means 1. The classifying means 13 classifies and throws the sheets or the like 2 into

symbol by long and short bars. The bar code BAH is read by bar code reading means 9a, and decoded by decoding

separate the sorting compartments S0, S1, S2 The belt 31 forms a part of a transfer path 7, and transfers

the sheets or the like 2 in the direction of the arrow. A pulley 18 drives the belt 31, and rollers 34 hold the sheets or the like 2 between themselves and the belt 31.

Gate diverters 35 classify into specified sorting compartments S0, S1, S2 ... the sheets or the like 2 sent in the arrow direction as they are held between the belt and the rollers 34, and can rotate for a specified angle about the centers of rotation 36. If a single belt 31 is used, the gate diverters 35 are mounted on either side of the belt 31 and at locations where the gate diverters 35 do not contact the belt 31 when the diverters 35 rotate about the centers of rotation 36. If two parallel belts 31 are used, the diverters 35 are placed between the two belts 31 at locations where the diverters 35 rotate about the centers of rotation 36.

To show an example, when the gate diverters 35 are substantially in parallel with the belt 31 as the diverters 35a and 35b are in Fig. 3, the sheets or the like 2 pass between the diverters 35a and 35b and are transferred to the diverter 35c. As the diverter 35c is rotated about the rotation center 36c for a specified angle and the leading end of the diverter 35c moves away from the belt 31 and turns closer towards the pulley 18, a sheet or the like 2 passes beneath the deflector gate 35c and falls into the sorting compartment S3.

If the above-mentioned mechanism is provided as many as a necessary number of sorting compartments in the longitudinal direction of the first accumulating means 1a and the second accumulating means 1b, to give an example, the first accumulating means 1a and the second accumulating means 1b can be respectively divided into five sorting compartments. The sheets or the like 2 are thrown into the respective sorting compartments are accumulated in substantially upright position and leaning on the partitions 30 of the sorting compartments S0 to S9.

Then, referring to Figs. 4 and 5, description will be made of examples of structures of the supply means 1 and the accumulating means 11, and the transfer means 7 and the reading means 9. Fig. 4 is a schematic diagram showing the structure of the first embodiment of the apparatus for sorting sheets or the like according to the present invention. The transfer means 7 is indicated by a solid line showing only the moving path of the sheets or the like 2.

The leading end of a sheet or the like 2 is indicated by a dark portion, the side on which a destination code 15 is printed is called the face A facing the side opposite the side where there is the first separating means 4a. A sheet or the like 2 (a) is separated by the separating means 4, transferred downwards and delivered to the transfer means 7 (the sheet b). The sheet or the like 2 being transferred has its destination code read by the destination code reading means 9 (the sheet c). At this stage, the face A is facing up, and the destination code reading means 9 is located above the transfer means and reads the destination code 15 from above the sheet or the like 2.

Subsequently, the sheet or the like 2 is transferred in the posture as shown at (d), and according to the contents of the destination code 15 printed on the face A of the sheet or the like 2, the sheet is accommodated into one of the sorting compartments of the accumulating means 11, with which a series of sorting steps is finished. The sheet or the like 2 at this time is in the same posture as shown at (a) when it is held by the supply means 1 as indicated by (f).

By moving the sheet or the like 2 from the accumulating means 11 to the supply means 1 and supplying it again to the separating means 4, the sorting operation of the sheet or the like can be repeated.

Fig. 5 is a schematic diagram showing the structure of another embodiment of the sheet or the like sorting apparatus according to the present invention. The differences from the first embodiment are that the transfer direction of the sheet or the like separated and fed from the feed means 1 is upwards and that there are provided first destination code reading means 9, located below the transfer means 7, for reading destination codes 15 from under the sheets or the like 2, second destination code reading means 90, located above the transfer means 7, for reading destination codes from above the sheets or the like 2, and selecting means 91 for selectively using the first destination reading means 9 or the second destination reading means 90.

Also in Fig. 5, if the direction of the sheets or the like 2 is indicated as in Fig. 4, the sheets or the like 2 are transferred through the points in the order of (a), (b) and (c) passing through the transfer path 7 and a juncture 8, and accumulated in the accumulating means 11, where the sheets or the like 2 are in the up side down, reverse-side up position (d). Therefore, in sorting for the second time, the destination code on the surface is read by the second destination code reading means 90.

According to the above structure, each time a series of sorting operation is repeated, by selecting the first destination code reading means 9 or the second destination code reading means 90 by selecting means 91, the sorting operation of sheets or the like 2 can be repeated.

Fig. 6 is a block diagram showing the arrangement of an embodiment of the apparatus for sorting sheets or the like according to the present invention. In Fig. 6, sorting control means 60 controls the classifying means 13, and a first memory unit 62 can store a destination code 15 (Fig. 2) read by the destination code reading means 9 and the thickness of a sheet or the like 2 obtained by thickness detecting means 18. Sequencing means 63 can sequence or rearrange the destination codes and the thicknesses of sheets or the like in the order of destination codes. Second memory unit 64 can store the respective digits of destination codes to be sorted and the corresponding sorting compartments in the accumulating means 11. Third memory unit 65 can store the destination codes and the thicknesses of sheets or the like 2 in relation to the corresponding sorting compartments. Fourth memory unit 66 can store the destination codes of the sheets or the like which need to be subjected to a reject process.

Separating means control means 67 controls the separating means 4. Supply means control means 68 controls the supply means 1. Movement control means 70 can move the sheets or the like 2, sorted and accumulated in the accumulating means 11, to the feed means 1 while maintaining the order in which they are accumulated. An embodiment of this means can be realized by extracting the bottom plate 12 from the accumulating means 11 to let the sheets or the like 2 fall into the supply means 1. Sorting information input means 71 can report delivery sorting information about the sheets or the like 2.

Control means 72 can control the destination code reading means 9, the sorting control means 60, the separating means control means 67, the supply means control means 68, the movement control means 70, and the sorting information input means 71.

By referring to Figs. 7 to 13, description will now be made of sorting (here this means the delivery route sequencing operation) of the sheets or the like 2 by the arrangement of the embodiment of the present invention. It ought to be noted that, for description, the contents of destination codes 15 are represented by three-digit numbers of 000 to 999, and to differentiate from other numbers, COD000 to COD999 are used. One thousand sheets or the like 2 assigned destination codes 15 and arranged in an irregular order are to be sequenced or rearranged in the order of destination codes 15 (delivery route sequencing operation).

To make description simple, the sheets or the like 2 are set to be a quantity that can be thrown into the feed means at a time, and the sheets or the like thrown into the sorting compartments are set not to exceed the capacity of each sorting compartment. Description of each component of the embodiment is omitted here, and description will only be made of a list of destination codes 15 in the process of sequencing the sheets or the like 2.

In Figs. 7 to 13, for description, the transfer means 7 for the sheets or the like is indicated schematically by only a solid line. The accumulating means 11 is divided into ten sorting compartments S0 to S9, and the sorting compartments are associated with numbers 0 to 9. The sheets or the like that have arrived are thrown into the sorting compartments corresponding to the destination codes 15.

Fig. 7 shows the condition that 1000 sheets or the like 2, which have been given three-digit destination codes 15 from COD000 to COD999, are supplied to the feed means 1. The sheets or the like are sequenced irregularly, with the rightmost sheet 2 being in contact with the separating means 4. As the vacuum chucking belt 6 of the separating means 4 rotates, only one rightmost sheet is separated, and delivered to the transfer means 7. The previously given destination code 15 on the sheet or the like 2 being transferred, that is, any value from COD000 to COD999 is read by the destination code reading means 9.

In processing at the first stage of sorting, as shown in Fig. 8, the sorting compartments S0 to S9 in the accumulating means 11 are associated with numbers 0 to 9. The sheet or the like 2 whose destination code 15 has been read by the first destination code reading means 9 is thrown into a sorting compartment which has the same assigned number as the number at the first digit, that is, at unit's place of the destination code 15. For example, if the digit at unit's place of the destination code is "2", the sheet or the like 2 is thrown into the sorting compartment of number 2, or S2.

When all sheets or the like 2 have been thrown likewise into the sorting compartments S0 to S9 by sorting by the digit at unit's place of destination codes 15, the sheets or the like which have the same number only at unit's place are collected in each sorting compartment. A destination code CODXX0 designates sheets or the like 2 which have 0 at unit's place but any other number from 0 to 9 at 10's place and 100's place. Similar description can be applied to destination codes CODXX1 and CODXX2.

When the first stage processing is finished as described above, all sheets or the like 2 are moved into the feed means 1 without disrupting the orders of the sheets as they are arranged in the sorting compartments S0 to S9 of the accumulating means 11. An embodiment of this means can be realized by extracting the bottom plate 12 from the accumulating means 11 to let all the sheets or the like 2 fall into the feed means 1.

Fig. 9 shows the condition after the sheets or the like 2 have been moved. Under this condition, if the sheets or the like 2 are moved from the feed means 1 to the separating means 4, only the rightmost sheet is separated again, and can be transferred along the transfer means. From this condition, the second stage processing is started. In the second stage processing, as shown in Fig. 10, the sorting compartments S0 to S9 are associated sequentially with numbers 0 to 9. As shown in Fig. 9, the sheets or the like 2 having 9 at unit's place are sent to the separating means 4, their destination codes 15 are read by the destination code reading means 9, and the sheets or the like are thrown into the sorting compartments whose numbers correspond to the numbers at 10's place (second digit) of their destination codes 15. Likewise, the sheets which have 8 to 0 at unit's place of their destination codes are thrown into the sorting compartments S0 to S9 corresponding to the numbers at the second digit, or at 10's place of their destination codes.

As a result, the sheets or the like 2 which have 99 as the last two digits are accumulated in the leftmost position, the sheets or the like which have 98 as the last two digits are accumulated in the position next to the leftmost ones, and likewise, the sheets or the like 2 having 80 as the last two digits are accumulated in the position next to the leftmost ones, and likewise, the sheets or the like 2 having 89 as the last two digits which have 89 as the last two digits are accumulated in the leftmost position, and those having 88 as the last two digits the numbers at 100's place may be completely random. In the next sorting compartment S1, the sheets or the like 2 likewise, the sheets or the like 2 which have 90 as the last two digits are thrown into the rightmost position. However, the sheets or the like which have 98 as the last two digits are accumulated in the position next to the leftmost ones, and

tions S2 to S9, the numbers at 100's place of destination codes are random, but those sheets having larger numbers
 as the last two digits are accumulated more to the left side in the accumulating means 11. Therefore, when the sheets
 or the like 2 accumulated in the accumulating means 11 are moved to the supply means 1, as shown in Fig. 11, the
 sheets or the like 2 having 00 as the last two digits are arranged at the rightmost position, with those having 99 as the
 last two digits are arranged at the leftmost position, and thus the second stage processing is finished.

In the third stage processing of sorting, as shown in Fig. 12, the sorting compartments S0 to S9 in the accumulating
 means 11 are associated with numbers 0 to 9. As shown in Fig. 11, the sheets or the like 2 having 00 as the last two
 digits are supplied to the separating means 4, their destination codes 15 are read by the first destination code reading
 means 9, and the sheets or the like are thrown into the sorting compartments which have numbers corresponding to
 the numbers at 100's place of their destination codes 15.

The sheets or the like 2 having any of numbers 8 to 0 at 100's place are sorted and thrown into one of the sorting
 compartments S0 to S9 corresponding to the numbers at 100's place of decoded destination codes 15.

Consequently, in the sorting compartment S0, the sheets or the like 2 are accumulated in such a way that the number
 at 100's place is 0 and the last two digits become greater from left to right. In the sorting compartment S1, the sheets
 or the like are accumulated in such a way that the number at 100's place is 1 and the last two digits become greater
 from left to right. Similarly, in the last sorting compartment S10, the sheets or the like 2 are accumulated in such a way
 that the number at 100's place is 9 and the last two digits become greater from left to right. Therefore, when the third
 stage processing is finished, the sheets or the like 2 of COD000 to COD999 are accumulated in the ascending order
 from left to right so that the destination codes increase from left to right.

The sequencing sorting has been described, and this algorithm itself is well known. Though description has been
 made of a case where the three-digit destination codes were sequenced so that their numbers are smaller from right to
 left. For example, in Figs. 8, 10 and 12, if the sequencing of code numbers in relation to the sorting compartments S0
 to S9 is set in a completely reverse sequence, the sheets or the like 2 can be sequenced so that the rightmost code is
 COD000 and the leftmost code is COD999. In the above case, the sequencing operation of the three-digit code numbers
 from COD000 to COD999 (1000 kinds) was done by repeating sorting to the ten sorting compartments three times, but
 the sequencing operation is not limited to this method, more specifically, if the number of sorting compartments is L and
 the number of times of repetition is n, it is possible to perform L to the n-th power ways of sequencing.

Meanwhile, in an actual sorting work, the quantity of sheets or the like to a specific destination (sorting compartment)
 is so large that sorting compartment becomes full in the course of sorting. A method for such a case is to accumulate
 in a separately-installed reject box the sheets or the like 2 to be sorted in the sorting compartment which is already full.
 In this method, however, after the sorting operation is finished, it is necessary to manually insert the sheets or the like
 2 accumulated in the reject box into specified positions.

Description will then be made of processing in a case where any of the sorting compartments S0 to S9 is filled with
 sheets or the like to overflowing in the course of sorting.

Figs. 14 and 15 schematically show the operation when overflowing occurs in the first stage sorting, that is, in the
 middle of sorting by the code number at unit's place, but depict only a part of the accumulating means 11. In addition
 to the sorting compartments, an auxiliary sorting compartment SA to be used when overflow of the sheets or the like 2
 occurs is provided adjacent to the sorting compartment S0.

In Fig. 14, the sorting compartment S1 for storing only the sheets or the like 2 whose destination codes have "1" at
 unit's place is full of sheets or the like (c), but the sheets or the like accumulated in the sorting compartment S0 have
 yet to reach the capacity and the sorting compartment S2 has room to be filled. Since the sorting compartment S1 is
 unable to accommodate the sheets or the like any more, the sheets or the like with "1" at unit's place are hereafter thrown
 into the sorting compartment S0 into which the sheets or the like 2 with "0" at unit's place have so far been accumulated.
 At the same time, the sheets or the like 2 with "0" at unit's place are thrown into the auxiliary sorting compartment SA.
 Fig. 15 shows the condition of the sheets or the like 2 accumulated by the above setting of the sorting compartments.
 In the sorting compartment S0, the sheets or the like 2 (d) with "1" at unit's place are stacked upon the sheets or the
 like 2 (a) with "0" at unit's place. In the auxiliary sorting compartment SA, the sheets or the like 2 sorted after the sheets
 or the like 2 (a) are accumulated. The sheets or the like 2 (a) and the sheets or the like 2 (b) are accumulated in different
 sorting compartments, but are consecutive in order without having sheets or the like with any other number at unit's
 place mixed between them. Likewise, the sheets or the like 2 (c) and the sheets or the like 2 (e) are consecutive in order
 though they are accumulated in different sorting compartments.

Therefore, the condition of the sheets or the like 2 in Fig. 15 is the same as the condition of the sheets or the like 2
 accumulated in different sorting compartments according to the numbers at unit's place as shown in Fig. 8, and the
 sorting operation shown in Fig. 9 and subsequent figures can be continued.

If there is only one sorting compartment of SA, it is possible to cope with only one case where an overflow occurs
 at any one of the sorting compartments S0 to S9. So, Fig. 16 shows an example of coping with an overflow in a plurality
 of sorting compartments. In Fig. 16, like in Fig. 14, an auxiliary sorting compartment SA is provided adjacent to the
 sorting compartment S0, and another auxiliary sorting compartment SB is provided between the sorting compartments S5 and
 S2 and S3, and yet another auxiliary sorting compartment SC is provided between the sorting compartments S5 and

S6. If the sorting compartments S4 to S2 are designated as a first block B1 and the sorting compartments S6 to S5 are designated as a second B2 block and the sorting compartments S4 and beyond are designated as a third block B3, in the first block B1, when an overflow of sheets or the like 2 occurs in any one of the sorting compartments S0 to S2, the overflow can be prevented by performing the same operation as was described with reference to Figs. 14 and 15. Like-
 10
 15
 20
 25
 30
 35
 40
 45
 50
 55

when some specific destinations to which lots of mail are sent can be presumed from the past records.
 In the above-described procedure, when an overflow occurs, the sheets or the like 2 are accumulated in an adjacent
 sorting compartment, so that the order in which the sheets or the like are arranged changes. On the other hand, the
 above-mentioned method is not used in the second or third stage processings because the sheets or the like must be
 accumulated in order.

To prevent an overflow of sheets or the like 2 in the second stage or the third stage processing, an effective method
 is to predict a sorting compartment where an overflow is liable to occur from the destination codes 15 of all sheets or
 the like 2 read in the sorting by the code numbers at unit's place, and allocate a plurality of sorting compartments. The
 operation of an embodiment of this method will be described with reference to the flowcharts.

Figs. 17 to 19 are flowcharts showing the operation of the apparatus for sorting sheets or the like according to the
 present invention. Fig. 17 shows the operation of the first stage processing, and Figs. 18 and 19 show the second stage
 and the third stage processing.

The operation of the first stage processing will be described with reference to Fig. 17. First, delivery sorting infor-
 mation is obtained which shows the correspondence between the destination codes 15 given to the sheets or the like
 2 to be processed and the delivery route from the sorting information input means 71 (step 100). At the same time, the
 sorting compartments which the sheets or the like 2 to be processed go into are inputted. The first stage sorting operation
 starts with the code numbers at unit's place, so N = 1 is set as the first digit (step 101). Then, from the second memory
 unit 64, initial setting values for the code numbers at unit's place and the corresponding sorting compartments are
 obtained for sorting by the numbers at unit's place (step 102), and the classifier means 13 is set (step 104). An example
 of this initial setting is shown in item 202 of Table 1. In this example, like in the description done with reference to Fig.
 16, auxiliary sorting compartments SA, SB and SC are provided. It may sometimes occur that adequate positions in
 which to provide the auxiliary sorting compartments differ with the destinations of the sheets or the like 2. For example,
 if it is predicted from the past records that overflow is likely to occur often in the sorting compartments S4 and S5, an
 auxiliary sorting compartment SB may be provided between the sorting compartments S4 and S5.

Example of Second Memory											
Sorting comp.	SA	S0	S1	S2	SB	S3	S4	S5	SC	S6	S7
Initial setting	-	xx0	xx1	xx2	-	xx3	xx4	xx5	-	xx6	xx7
After overflows	xx0	xx1	-	xx2	-	xx3	xx4	xx5	xx6	xx7	xx8
											xx9

Table 1

Then, sheets or the like are set in the supply portion (step 105), the separating means 4 is driven to separate a
 sheet from the sheets or the like 2 and delivered to the transfer system 7 (step 106), and the thickness of the sheet or
 the like 2 is measured by the thickness measuring means 18 (step 107). Next, the destination code 15 is read by the destination code
 reading means 9 (step 109), and the destination code is associated with the thickness and stored in the first memory
 unit 62 (step 110). The contents of the first memory unit 62 at this time are shown as an example in Table 2. The sheet
 serial number (item 204) is the number given sequentially to each sheet. Thus, the first memory unit 62 stores the
 destination code (item 205) associated with the thickness (item 206) for each sheet or the like 2.

Tabl 2 Contents of First Memory

Sheet Ser No.	Destination Code	Thickness
000	COD981	2
001	COD454	1
002	COD214	1
003	COD648	3
004	COD020	1
.	.	.
.	.	.
.	.	.
.	.	.
998	COD234	1
999	COD522	5

The classifier means 13 corresponding to the number at unit's place of the destination code is operated to classify the sheet into the relevant sorting compartment (step 111). If that sorting compartment is full, the sheet cannot be accommodated, and abnormality detecting means issues an abnormality signal (step 112). If the sorting compartment is not full, the sorting operation continues by repeating steps 106 to 111. However, when the relevant sorting compartment is full and there remain sheets or the like 2 to be sorted (step 113), the set values at unit's place for the sorting compartments are changed in the second memory unit (step 114). For example, if an overflow occurs in the sorting compartment S1 for which number "1" is set at unit's place, as shown in the columns SA, S0 and S1 in item 203, the initial setting for the sorting compartment S1 is reset and the existing settings for S0 and S1 are moved each one step in the direction of the auxiliary sorting compartment SA. The settings of the classifier means 13 are similarly changed (step 116), and steps from 106 to 111 are repeated. Item 203 of Table 1 shows a case where the sorting compartments S1 and S8 are full.

When all sheets or the like 2 have been sorted, all sheets or the like 2 in the accumulating means 11 are moved to the supply means without changing the current order. With this, the first stage sorting by the numbers at unit's place of the destination codes is finished.

Then, the second stage sorting, in other words, sorting by the numbers at 10's place (second digit) of the destination codes is performed. Initially, by the procedure in Fig. 18, the sorting compartments are set by using the destination codes and the thicknesses of all sheets or the like, obtained by the first stage sorting.

In Fig. 18, $N = 2$ is set as the second digit, and the total number of the sorting compartments, more specifically, the total number of the sorting compartments provided in the apparatus for sorting sheets or the like according to the second digit is set at 13 (step 1200). The destination codes and the thicknesses of all sheets or the like 2 are read from the first memory unit 62 (step 120). The thicknesses of the sheets or the like 2 having destination codes including the same number at 10's place (second digit) are totaled (step 121), and a decision is made whether or not those sheets or the like can be accommodated in one sorting compartment (step 122). If it is predicted that sheets or the like overflow from the sorting compartment, a plurality of consecutive sorting compartments are allocated for the sheets with the same number (step 123). An example of setting the sorting compartments will be describe with reference to Table 3.

15

20

25

30

35

40

45

50

55

55 50 45 40 35 30 25 20 15 10 5

Table 3 Example of Setting Sorting Compartments in Sorting by Second Digit

	Group 0		Group 1		Group 9	
	Destination code	Thickness	Destination code	Thickness		Destination code	Thickness
Data read	COD104	5	COD211	2	COD093	1
	COD200	1	COD816	2	COD592	1
	COD806	1	COD017	1	COD099	4
	COD407	2	COD414	1	COD291	2

	COD007	3	COD913	3	COD194	1
			COD119	4		
Total thickness	ECODx0x	60 (<S)	ECODx1x	85 (>S)	ECODx9x	55 (<S)
No. of sorting comp.		1		2		1

In Table 3, groups 0, 1 and 9 are the groups of the destination codes and the thicknesses having respectively the same numbers at 10's place of the destination codes. The group 0 includes the sheets or the like having 0 at 10's place, and the group 1 includes the sheets or the like having 1 at 10's place. The thicknesses of the sheets or the like of each

group are totaled. For example, x is used to designate an arbitrary number and the total thickness of the sheets or the like having 0 at 10's place of the destination codes is designated by $\Sigma CODx0x$, and the thickness of the sheets or the like 2 that can be accommodated in one sorting compartment is designated by S. As an example, suppose $S = 70$ mm, (second digit) can be accommodated. However, in group 1, if $\Sigma CODx0x$ is 85 mm, since $\Sigma CODx0x > S$, these sheets or the like 2 cannot be accommodated in one sorting compartment.

The above-mentioned operation is repeated until the number at 10's digit is 9 and, for example, two or more consecutive sorting compartments are allocated for the sheets or the like 2 having 1 at 10's digit of the destination codes. A decision is made whether or not allocations have been made for all sorting compartments (step 124), and if not, similar setting is made for the next sorting compartment (step 125).

Then, a decision is made whether or not the number of sorting compartments which have been set is greater than or equal to the total number of sorting compartments J (step 126). If the decision is YES, all sheets or the like 2 can be accumulated. Therefore, the allocated sorting compartments are stored in the second memory unit 64 and setting of N = the second digit is completed (step 127). On the other hand, if the number of allocated sorting compartments is larger than the total number of sorting compartments J, the sorting compartments are insufficient for accommodating all sheets or the like 2. In this case, groups of sheets or the like are selected which require a plurality of sorting compartments to be allocated (step 128), and the allocated sorting compartments are set anew by rejecting some sheets or the like 2 to reduce the required number of sorting compartments. An example in this case will be described with reference to Tables 4 and 5.

Table 4

Example of Setting Sorting Spaces						
Group	Total thickness		Thickness (mm)		Thickness distribution to sorting compartments (mm)	No. of sorting spaces
	Destination code		No. 1	No. 2	No. 3	
0	$\Sigma CODx0x$	60	60			1
1	$\Sigma CODx1x$	85	70	15		2
2	$\Sigma CODx2x$	45	45			1
3	$\Sigma CODx3x$	150	70	70	10	3
4	$\Sigma CODx4x$	20	20			1
5	$\Sigma CODx5x$	120	70	50		2
6	$\Sigma CODx6x$	15	15			1
7	$\Sigma CODx7x$	100	70	30		2
8	$\Sigma CODx8x$	40	40			1
9	$\Sigma CODx9x$	55	55			1
Total of required sorting compartment: 15						

Table 4 shows an example of the total thickness of sheets or the like 2 to be accumulated in groups 0 to 9 shown in Table 3 and allocated accumulation thicknesses of the respective sorting compartments. So long as the total thickness of each group is 70 mm or less, sheets or the like can be accumulated in one sorting compartment. However, for group 1, for example, the total thickness of which is greater than 70 mm, the excess amount over the 70 mm needs to be accumulated in the second sorting compartment, and for group 3 whose total thickness is greater than 140 mm, the excess amount needs to be accumulated using the third sorting compartment. By step 128, groups 1, 3, 5 and 7 are selected. In the example shown in Table 4, to sort all the sheets or the like 2, 15 sorting compartments are required, but because the total number of sorting compartments is 13, there are a shortage of two sorting compartments to allocate. In this case, the sheets or the like 2, which cannot be accommodated in the 13 sorting compartments and which have two imaginary sorting compartments allocated, have to be rejected and manually added to the already sorted sheets or the like 2. The quantity of sheets or the like to be rejected should be minimized, so that it is better to sequentially select those sorting compartments which have smaller numbers of sheets or the like to be rejected. For example, in the example shown in Table 4, if the number of allocated sorting compartments for groups 1 and 3 is reduced from 2 to 1

and from 3 to 2, respectively, it is only necessary to reject sheets with a thickness of no more than 25 mm. Furthermore, if the sheets with greater thickness are selectively rejected sooner than others, the number of sheets or the like to be rejected can be made smaller. For example, for postcards each 0.3 mm in thickness, the required number of postcards is more than 80 to reach a thickness of 25 mm, while for envelopes each 5 mm in thickness, the required number of envelopes is five at most to reach the 25 mm thickness. So, mails are sequenced in the descending order of thickness for each destination group by the order forming means and stored in the third memory unit 65 (step 129). Table 5 shows an example of contents of the third memory unit.

5

10

15

20

25

30

35

40

45

50

55

Table 5 Example of Setting Sorting Compartments in Sorting by Second Digit
(Contents of Third Memory)

	Group 1		Group 3		Group 7	
	Destination code	Thickness	Destination code	Thickness	Destination code	Thickness
Data Read	COD114	5	COD231	6	COD073	6
	COD017	5	COD836	6	COD572	5
	COD417	4	COD037	5	COD079	5
	COD933	4	COD434	5	COD271	5

	COD210	1	COD933	1	COD174	1
	COD816	1	COD139	1		
	ECODx1x	85	ECODx3x	150	ECODx7x	100
No. of Sorting Compts.	2		3		2	

Table 5 shows examples of groups 1, 3 and 7. It is understood from Table 5 that in group 1, since it is only necessary to reject sheets or the like corresponding to a thickness of no more than 15 mm, four thickest sheets or the like need to be rejected and in group 3, two thickest sheets or the like need to be rejected. In this way, it is possible to find in each

group the number of sheets or the like 2 that allows the number of sorting compartments to be decreased (step 130). With regard to the sheets or the like 2 to be rejected obtained by the above method, their destination codes are stored in the fourth memory unit 66 (step 131) and, when they are read, they are rejected without being sorted. An example of the contents of the fourth memory unit 66 is shown in Table 6, more specifically, the destination codes of the sheets or the like 2 to be rejected are stored.

Table 6

Example of Contents of Fourth Memory	
Destination code	
COD114	
COD017	
COD417	
COD933	
COD231	
COD836	

If sheets or the like 2 are rejected in advance in the descending order of thickness as has been discussed above, the number of sheets or the like 2 rejected when the number of sorting compartments is smaller than or equal to the total number of sorting compartments 1 can be minimized, so that subsequent manual insertion work can be decreased. If the destination codes of the sheets or the like 2 which are to be rejected are decided, the required number of sorting compartments becomes smaller than or equal to 1, so that the allocated sorting compartments are stored in the second memory unit 64 (step 127). This operation is repeated up to the third digit of the destination codes (steps 132 and 133), and settings are finished with setting of the sorting compartments in the third stage of sorting (step 134). In the third stage of sorting, the sheets or the like 2 of the destination codes stored in the fourth memory unit 66 have already been rejected, so that allocation of the sorting compartments has only to be done for the remaining sheets or the like 2 exclusive of those rejected.

The allocated sorting compartments in the second stage and the third stage sorting obtained as described and stored in the second memory unit 64 are shown as an example in Table 7. The example in sorting by the second digit (second stage sorting) in Table 7 corresponds to the examples shown in Tables 4 to 6. One sorting compartment is allocated to group 1 (x1x), two sorting compartments are allocated to group (x3x), with sheets or the like 2 of the destination codes shown in Table 6 being rejected.

Table 7

Example of Contents of Second Memory											
Sorting compct			Sorting by second digit			Sorting by third digit					
SA	S0	S1	S2	SB	S3	S4	S5	SC	S6	S7	S8
x9x	x8x	x7x	x7x	x6x	x5x	x5x	x4x	x3x	x3x	x2x	x1x
0xx	1xx	1xx	2xx	3xx	4xx	5xx	6xx	7xx	7xx	8xx	9xx

After the sorting compartments in sorting by the second digit and sorting by the third digit have been set, the sorting operation in the second stage is started. In Fig. 19, numbers are set at the second digit of the destination codes (step 140), the allocated sorting compartments in the second stage are obtained from the second memory unit 64 (step 141), in accordance with which the classifier means 13 is set (step 142). A sheet or the like 2 is separated (step 143), and its destination code is read (step 144). The destination code is compared with the destination codes stored in the fourth memory unit 66 (step 145), and if the destination code coincides with a destination code stored in the fourth memory unit 66, this means that that sheet or the like is one to be rejected, and therefore the sheet is thrown into the reject box (step 146). If they don't coincide, the sheet is classified and thrown into the corresponding sorting compartment (step 147), a decision is made whether or not sorting has been completed (step 148), and if sorting has not been completed, steps 143 to 148 are repeated. When all sheets or the like 2 have been sorted, all the sheets or the like are moved from the accumulating means 11 to the supply means keeping their order unchanged (step 149). A decision is made whether

or not sorting up to the third stage (third digit) has been finished (step 150), and if not finished, 3 is set as the digit for sorting of the third stage (step 151), the numbers to be set as the third digit for the sorting compartments as shown in Fig. 7 are obtained from the second memory unit 64 (step 141), and steps 142 to 149 are repeated. When sorting of the third stage (third digit) is completed, sorting of all sheets or the like 2 is finished (step 152).

In the embodiment, the thickness of all sheets or the like 2 to be processed is supposed to be measured. However, when the sheets or the like 2 to be processed are postcards only, for example, and their thickness is known, thickness measurement can be omitted and preset information about thickness may be used.

Further, even if sheets or the like 2 of different thicknesses are mixed, for example, an average thickness may be used and the thickness measuring means 18 omitted. In this case, the first memory unit is used to store destination codes only. When setting the sorting compartments as shown in Table 3, since in this case all sheets or the like are supposed to have an equal thickness, an average thickness may be used. In Table 5 and in steps 129 to 131 in Fig. 18,

since all sheets or the like are supposed to have an equal thickness, it is impossible to previously decide the destination codes of the sheets or the like to reject. Therefore, in such a case as above, in reducing the allocated sorting compartments in Table 4, those compartments for smaller thicknesses should be reduced by being given preference over others, and when the allocated sorting compartments become full, the subsequently sorted sheets or the like 2 should be rejected.

Meanwhile, the length differs between postcards and a majority of envelopes, or rather the envelopes are longer. Therefore, by measuring the length of the sheets or the like 2 midway through the transfer path 7, whether an individual sheet or the like 2 being processed is a postcard or an envelope can be determined almost completely. Because envelopes are thicker than postcards, if several kinds of thicknesses are used which correspond to measured lengths, overflow can be predicted with higher precision than by using an average thickness indiscriminately. In measuring the length as mentioned above, if the time of the light of an optical sensor being intercepted by a sheet or the like is measured by the optical sensor, the length of sheets or the like can be measured from the transfer speed of the sheets or the like by the transfer path 7 and the light interception time. If a sheet or the like is determined as a postcard and the thickness is set at 0.3 mm, or if a sheet or the like is determined as an envelope and the thickness is set at 2 mm for example, by using those two kinds of thickness, the same process can be performed as when the thickness is measured by the measuring means 18 in this embodiment.

According to the embodiment of the present invention, by using a small sorter with about 13 to 15 sorting compartments, it is possible to sequence the sheets or the like with destination codes indicated, or mails for example in an order designated by the destination codes. As an example, if the destination codes indicate the delivery points and their list is associated with the delivery route, the supplied mails can be sequenced along the route traveled in delivering mail. Further, when auxiliary sorting compartments are set and the regular sorting compartments become full, the allocation of the sorting compartments can be changed, and therefore if the sheets or the like are concentrated in some sorting compartments, there are less chances that the sorting compartments become full and are unable to accommodate any more, so that the sheets or the like can be sequenced effectively.

Further, if sheets or the like are rejected when the number of the allocated sorting compartments exceeds the total number of the sorting compartments provided in the apparatus for sorting sheets or the like, by having the sheets or the like to be rejected in the order of thickness determined previously, the number of sheets or the like to be rejected can be decreased, and the number of sheets or the like to be inserted manually after sorting is over can be reduced, so that the efficiency of the sorting work can be improved.

According to the present invention, the sorting apparatus is so structured that the accumulator is located above the feed means, and when the sheets or the like sorted and accumulated in the accumulator are supplied again to the supply means, the sheets or the like can be moved from the accumulator to the feed means. Therefore, the delivery route sequencing work can be done with higher efficiency and the apparatus can be reduced in size.

According to the present invention, auxiliary sorting shelves are dispersed among the regular sorting shelves and the shelves are divided into blocks, and if an overflow occurs, the correspondence between the destinations and the sorting shelves is shifted (if an overflow occurs at the fifth compartment, for example, in the sorting operation for the first time, the second shelf compartment is shifted to the first (more specifically, to the preceding auxiliary shelf compartment), the third compartment to the second, the fourth compartment to the third, the fifth compartment that is to overflow to the fourth. The sorting compartments are set for the sorting operation for the second time by the destinations obtained in the sorting for the first time, so that batch movement is thus made possible, and no problem arises because the general (procedure) of delivery route sequencing remains unchanged.

Note that the delivery route sequencing in the present invention is done by the radix sorting method. Information about the thickness of mails is obtained in the sorting operation for the first time, thereby reducing waste time. This is possible because countermeasures for overflow are taken even in the sorting operation for the first time as mentioned above. Thicker mails are rejected by preference over others, thereby reducing the quantity to be rejected.

Further, in the present invention, various contrivances are made, including the return to the same sorting shelf/hopper, and the prediction of the thickness by measurement of postal matter.
Therefore, according to the present invention, the sheets or the like, such as postal matter, on which the destination codes are indicated, can be rearranged sequentially by the destination codes, so that the efficiency of the delivery route sequencing can be improved.

Claims

1. A method for sorting sheets or the like comprising the steps of:
 10 separating by separating means (4) a sheet or the like from a plurality of sheets or the like fed from feed means (1) holding said sheets or the like in upright position, and transferring said sheet or the like; after said sheet or the like is transferred, reading a destination code of said sheet or the like by destination code reading means (9) for reading said destination code previously attached to said sheet or the like, and storing said destination code a first memory unit;
 15 storing in a second memory unit a sorting setting showing correspondence between said destination codes and a plurality of sorting compartments in accumulating means (11);
 classifying and throwing said sheet or the like into one of said sorting compartments of said accumulating means (11) according to said destination code;
 performing a series of sorting steps of sequentially sorting and accumulating said sheets or the like in upright position into said plurality of sorting compartments of said accumulating means (11), located above and adjacent to said feed means (1), according to said sorting setting;
 20 after said sorting operation, moving the accumulated sheets or the like from said accumulating means (11) again to said feed means (1);
 subsequently, rearranging said sheets or the like in a specified order according to said destination codes by repeating said sorting operation;
 25 determining a sorting setting showing correspondence between destination codes in said sorting operation for a second time and beyond and said sorting compartments by using said destination codes stored in said sorting operation for a first time, and storing said sorting setting in said second memory unit; and
 30 performing said sorting operation for the second time and beyond according to said sorting setting stored in said second memory unit.
 2. A method for sorting sheets or the like according to Claim 1, further comprising the steps of:
 providing, in an apparatus of sorting sheets or the like, an auxiliary sorting compartment adjacent to said sorting compartments and abnormality detecting means for detecting an abnormality signal when any sorting compartment becomes unable to accumulate said sheets or the like;
 35 stopping sorting and throwing said sheets or the like into allocated sorting compartments when said abnormality signal is detected during said sorting operation for the first time;
 changing said sorting setting, which has been allocated to all the sorting compartments from a sorting compartment closest to said auxiliary sorting compartment to a sorting compartment where said abnormality signal was detected, and then allocating the changed sorting setting to all the sorting compartments from said auxiliary sorting compartment to a sorting compartment adjacent on said auxiliary sorting compartment to said sorting compartment
 40 where said abnormality signal was detected, and storing said changed sorting setting in said second memory unit; and
 continuing said sorting operation according to said sorting setting stored in said second memory unit.
 3. A method for sorting sheets or the like according to Claim 2, wherein said sorting setting is to set a plurality of said auxiliary sorting compartments and also provide a plurality of sorting compartments between said auxiliary sorting compartments.
 4. A method for sorting sheets or the like according to Claim 2, further comprising the steps of selecting one of a plurality of groups of destination codes, and providing sorting information inputting means for inputting a specified sequencing order previously determined for each group of destination codes and also inputting said sorting setting, wherein the way in which said auxiliary sorting compartments and said sorting compartments are arranged in said sorting setting differs with different groups of destination codes.
 5. A method for sorting sheets or the like comprising the steps of:
 55 separating by separating means (4) a sheet or the like from a plurality of sheets or the like fed from feed means (1) holding said sheets or the like in upright position, and transferring said sheet or the like; after said sheet or the like is transferred, reading a destination code of said sheet or the like by destination

code reading means (9) for reading said destination code previously attached to said sheet or the like, and storing said destination code a first memory unit;

storing in a second memory unit a sorting setting showing correspondence between said destination codes and a plurality of sorting compartments in accumulating means (11);

classifying and throwing said sheet or the like into one of said sorting compartments of said accumulating means (11) according to said destination code;

performing a series of sorting steps of sequentially sorting and accumulating said sheets or the like in upright position into said plurality of sorting compartments of said accumulating means (11), located above and adjacent to said feed means (1), according to said sorting setting;

after said sorting operation, moving the accumulated sheets or the like from said accumulating means (11) again to said feed means (1);

subsequently, rearranging said sheets or the like in a specified order according to said destination codes by repeating said sorting operation;

storing in a third memory unit the number of sheets or the like to be sorted and thrown into each of said sorting compartments in a third memory unit;

obtaining the number of said sheets or the like sorted and thrown into each sorting compartment in a sorting operation for a second time from said destination codes stored in said first memory unit in said sorting operation for a first time, and storing the obtained number of said sheets or the like in said third memory unit;

arranging said sorting setting so as to allocate a plurality of consecutive sorting compartments to accommodate said number of sheets or the like as applicable sorting compartments when said number of sheets or the like exceeds a specified value in any of the sorting compartments, and storing said sorting setting in said second memory unit; and

performing said sorting operation for the second time and beyond according to said sorting setting.

25 6. A method for sorting sheets or the like according to Claim 5, wherein if said sorting setting is provided such that a plurality of sorting compartments are allocated because said number of sheets or the like stored in said third memory unit is greater than a specified number, when the set number of sorting compartments is greater than the total number of sorting compartments provided in said accumulating means (11), said sorting setting is changed so that the set number of sorting compartments is smaller than or equal to the total number of sorting compartments by reducing the allocated sorting compartments by sequentially selecting the sorting compartments with smaller excess numbers of sheets or the like over said specified number.

30 7. A method for sorting sheets or the like comprising the steps of:

separating by separating means (4) a sheet or the like from a plurality of sheets or the like fed from feed means (1) holding said sheets or the like in upright position, and transferring said sheet or the like;

code reading means (9) for reading said destination code previously attached to said sheet or the like, and storing said destination code in a first memory unit;

storing in a second memory unit a sorting setting showing correspondence between said destination codes and a plurality of sorting compartments in accumulating means (11);

classifying and throwing said sheet or the like into one of said sorting compartments of said accumulating means (11) according to said destination code;

performing a series of sorting steps of sequentially sorting and accumulating said sheets or the like in upright position into said plurality of sorting compartments of said accumulating means (11), located above and adjacent to said feed means (1), according to said sorting setting;

after said sorting operation, moving the accumulated sheets or the like from said accumulating means (11) again to said feed means (1);

subsequently, rearranging said sheets or the like in a specified order according to said destination codes by repeating said sorting operation;

storing in a third memory unit the number of sheets or the like to be sorted and thrown into each of said sorting compartments in a third memory unit;

obtaining the number of said sheets or the like sorted and thrown into each sorting compartment in a sorting operation for a second time from said destination codes stored in said first memory unit in said sorting operation for a first time, and storing the obtained number of said sheets or the like in said third memory unit;

arranging said sorting setting so as to allocate a plurality of consecutive sorting compartments to accommodate said number of sheets or the like as applicable sorting compartments when said number of sheets or the like exceeds a specified value in any of the sorting compartments, and storing said sorting setting in said second memory unit; and

performing said sorting operation for the second time and beyond according to said sorting setting.

55 obtaining said destination codes and thicknesses of the sheets or the like, sorted into each sorting compartment in said sorting operation for the second time, from said destination codes and thicknesses stored in said first memory unit in sorting operation for the first time, and storing said destination codes and thicknesses in said third memory;

- when a total thickness of sheets or the like exceeds a specified thickness in any sorting compartment, arranging said sorting so that a plurality of consecutive sorting compartments capable of accommodating only sheets or the like of said thickness are allocated as applicable sorting compartments, and storing said sorting setting in said second memory unit; and
- performing said sorting operation for the second time and beyond according to said sorting setting.
- 5
8. A method for sorting sheets or the like according to Claim 7, wherein if said sorting setting is provided such that a plurality of sorting compartments are allocated because a total of the thicknesses of sheets or the like stored in said third memory unit exceeds a specified thickness, when the set number of sorting compartments is greater than the total number of sorting compartments provided in said accumulating means (11), said sorting setting is arranged so that the set number of sorting compartments is greater than or equal to a total number of the sorting compartments in said accumulating means (11) by reducing the allocated sorting components by sequentially selecting sorting compartments with smaller excess numbers over said specified thickness, and then said sorting operation for the second time and beyond are performed.
- 15
9. A method for sorting sheets or the like according to Claim 7, further comprising the steps of:
providing, in an apparatus for sorting sheets or the like, order forming means for sequencing said destination codes stored in said third memory unit and a fourth memory unit for storing destination codes of sheets or the like to be rejected;
deciding sheets or the like to be rejected in the descending order of thickness until the number of the set sorting compartments becomes smaller than or equal to a total number of the sorting compartments in said accumulating means (11);
storing in said fourth memory unit said destination codes of said sheets or the like to be rejected, and then performing said sorting operation for the second time and beyond;
- 25
- when a destination code read by said destination code reading means (9) is stored in said fourth memory unit, rejecting that sheet or the like.
- 30
10. A method for sorting sheets or the like according to Claim 7, wherein said thickness measuring means measures the length of said sheets or the like midway through said transfer means (7), and specifies predetermined thicknesses corresponding to measured lengths.
- 35
11. A method for sorting sheets or the like according to Claim 1, wherein said sheets or the like accumulated in said accumulating means (11) are moved to said feed means (1) by keeping their order unchanged, and a sheet or the like is separated again from a stack of sheets or the like by said separating means (4).
- 40
12. An apparatus for sorting sheets or the like comprising:
feed means (1) for holding a plurality of sheets or the like in upright position;
separating means (4) for separating a sheet or the like from inside said feed means (1);
accumulating means (11) located adjacent to and above said feed means (1) and having a plurality of sorting compartments for sequentially accumulating sheets or the like in upright position;
destination code reading means (9) for reading destination codes previously attached to sheets or the like; means for transferring sheets or the like, connecting said separating means (4) and said accumulating means (11);
first memory unit for storing said destination codes of the sheets or the like read by said destination code reading means (9);
second memory unit for storing sorting setting showing correspondence between said destination codes and said sorting compartments; and
means (13) for classifying and throwing the sheets or the like into one of the sorting compartments of said accumulating means (11) according to said destination codes.
- 50
- wherein said sheets or the like supplied to said feed means (1) are separated by said separating means (4) one by one, a single sheet or the like is transferred by said transfer means (7), said destination code is read by said destination code reading means (9), a series of sorting steps are performed according to sorting setting stored in said second memory unit to sort and accumulate said sheets or the like in said accumulating means (11), and after said sorting operations, said sheets or the like accumulating in said accumulating means (11) are moved again to said feed means (1) and then said sorting operations are repeated so that said sheets or the like are sequenced in a specified order according to said destination codes, and wherein said second memory unit is a memory unit to store sorting setting showing correspondence between said destination codes and said sorting compartments to be used in said sorting operations for the second time and beyond, said sorting setting being determined by said second memory by using said destination codes stored in said first memory unit in said sorting operations for the
- 55

- first time, and said sorting operations for the second time onwards according to said sorting setting stored in said second memory unit.
13. An apparatus for sorting sheets or the like according to Claim 12, further comprising auxiliary sorting compartments allocated to said sorting compartments and abnormally detecting means for detecting an abnormality signal when any sorting compartment becomes unable to accumulate said sheets or the like, wherein when said abnormally signal is detected during said sorting operation performed for the first time, the sorting and throwing of said sheets or the like into corresponding sorting compartments is stopped, said sorting setting is changed which has been allocated to all the sorting compartments from a sorting compartment closest to said auxiliary sorting compartment to a sorting compartment where said abnormally signal was detected, and then allocating the changed sorting setting to all the sorting compartments from said auxiliary sorting compartment to a sorting compartment adjacent on said auxiliary sorting compartment to said sorting compartment where said abnormally signal was detected, and storing said changed sorting setting in said second memory unit, and said sorting operation is continued according to said sorting setting stored in said second memory unit.
14. An apparatus for sorting sheets or the like according to Claim 13, wherein said sorting setting provides a plurality of auxiliary sorting compartments in said sorting operation for the first time and a plurality of said sorting compartments between said auxiliary sorting compartments.
15. An apparatus for sorting sheets or the like according to Claim 13, wherein one of a plurality of groups of destination codes is selected, and sorting information inputting means for inputting a specified order of rearrangement previously determined for each group of destination codes and also inputting said sorting setting, wherein the way in which said auxiliary sorting compartments and said sorting compartments are arranged in said sorting setting differs with said different groups of destination codes.
16. An apparatus for sorting sheets or the like comprising:
 feed means (1) for holding a plurality of sheets or the like in upright position;
 separating means (4) for separating a sheet or the like from inside said feed means (1);
 accumulating means (11) located adjacent to and above said feed means (1) and having a plurality of sorting compartments for sequentially accumulating sheets or the like in upright position;
 destination code reading means (9) for reading destination codes previously attached to sheets or the like; means for transferring sheets or the like, connecting said separating means (4) and said accumulating means (11);
 first memory unit for storing said destination codes of the sheets or the like read by said destination code reading means (9);
 second memory unit for storing sorting setting showing correspondence between said destination codes and said sorting compartments; and
 means (13) for classifying and throwing the sheets or the like into one of the sorting compartments of said accumulating means (11) according to said destination codes,
 wherein said sheets or the like supplied to said feed means (1) are separated by said separating means (4) one by one, a single sheet or the like is transferred by said transfer means (7), said destination code is read by said destination code reading means (9), a series of sorting steps are performed according to sorting setting stored in said second memory unit to sort and accumulate said sheets or the like in said accumulating means (11), and after said sorting operations, said sheets or the like accumulated in said accumulating means (11) are moved again to said feed means (1) and then said sorting operations are repeated so that said sheets or the like are sequenced in a specified order according to said destination codes, wherein a third memory unit is provided for storing the numbers of sheets or the like to be sorted and thrown into each sorting compartment during sorting operations for the second time, and the obtained numbers are stored in said third memory unit, and wherein said sorting setting is arranged so that a plurality of consecutive sorting compartments capable of accommodating only said numbers of sheets or the like are allocated as applicable sorting compartments when said number exceeds a specified number in any sorting compartment, and said sorting setting is stored in said second memory unit, and said sorting operations for the second time and beyond are performed according to said sorting setting.
17. A method for sorting sheets or the like according to Claim 16, wherein if said sorting setting is provided such that a plurality of sorting compartments are allocated because said number of sheets or the like stored in said third memory unit is greater than a specified number, when the set number of sorting compartments is greater than the total number of sorting compartments provided in said accumulating means (11), said sorting setting is changed

- so that the set number of sorting compartments is smaller than or equal to the total number of sorting compartments by reducing the allocated sorting compartments by sequentially selecting the sorting compartments with smaller excess numbers of sheets or the like over said specified number.
18. An apparatus for sorting sheets or the like comprising:
 feed means (1) for holding a plurality of sheets or the like in upright position;
 separating means (4) for separating a sheet or the like from inside said feed means (1);
 accumulating means (11) located adjacent to and above said feed means (1) and having a plurality of sorting compartments for sequentially accumulating sheets or the like in upright position;
 destination code reading means (9) for reading destination codes previously attached to sheets or the like; means for transferring sheets or the like, connecting said separating means (4) and said accumulating means (11);
 thickness measuring means, located midway through said transfer means (7), for measuring the thickness of sheets or the like;
 first memory unit for storing said destination codes of the sheets or the like read by said destination code reading means (9) and their thicknesses associated with said destination codes;
 second memory unit for storing setting showing correspondence between said destination codes and said sorting compartments; and
 means (13) for classifying and throwing the sheets or the like into one of the sorting compartments of said accumulating means (11) according to said destination codes,
 wherein said sheets or the like fed to said feed means (1) are separated by said separating means (4) one by one, a single sheet or the like is transferred by said transfer means (7), said destination code is read by said destination code reading means (9), a series of sorting steps are performed according to sorting setting stored in said second memory unit to sort and accumulate said sheets or the like in said accumulating means (11), and after said sorting operations, said sheets or the like accumulated in said accumulating means (11) are moved again to said feed means (1) and then said sorting operations are repeated so that said sheets or the like are sequenced in a specified order according to said destination codes, wherein a third memory unit is provided to store said destination codes and thicknesses of sheets or the like to be sorted and thrown into each said sorting compartment, said destination codes and thicknesses of sheets or the like to be sorted and thrown into each sorting compartment during sorting operations for the second time are obtained from said destination codes and thicknesses stored in said first memory unit in the sorting operations for the first time, and stored in said third memory unit, and wherein said sorting setting is arranged so that a plurality of consecutive sorting compartments capable of accommodating only said sheets or the like are allocated as applicable sorting compartments when a total thickness of sheets or the like exceeds a specified thickness in any sorting compartment, and said sorting setting is stored in said second memory unit, and said sorting operations for the second time and beyond are performed according to said sorting setting.
19. An apparatus for sorting sheets or the like according to Claim 18, wherein if said sorting setting is provided such that a plurality of sorting compartments are allocated because a total thickness of sheets or the like is greater than a specified thickness in any sorting compartment, when the set number of sorting compartments is greater than the total number of sorting compartments provided in said accumulating means (11), said sorting setting is changed so that the set number of sorting compartments is smaller than or equal to the total number of sorting compartments by reducing the allocated sorting compartments by sequentially selecting the sorting compartments with smaller excess thicknesses of sheets or the like over said specified thickness, and then said sorting operation for the second time and beyond are performed.
20. An apparatus for sorting sheets or the like according to Claim 19, further comprising means for sequencing in order of thickness said destination codes stored in said third memory unit; and a fourth memory unit for storing destination codes of sheets or the like to be rejected, wherein sheets or the like are decided which are to be rejected in the descending order of thickness until the number of the set sorting compartments becomes smaller than or equal to a total number of the sorting compartments in said accumulating means (11), said destination codes of said sheets or the like to be rejected are stored into said fourth memory unit and then said sorting operation for the second time and beyond are performed, and when a destination code read by said destination code reading means (9) is stored in said fourth memory unit, that sheet or the like is rejected.
21. An apparatus for sorting sheets or the like according to Claim 18, wherein said thickness measuring means, located midway through said transfer means (7), measures the length of said sheets or the like, and specifies predetermined thicknesses corresponding to measured lengths.

FIG.1

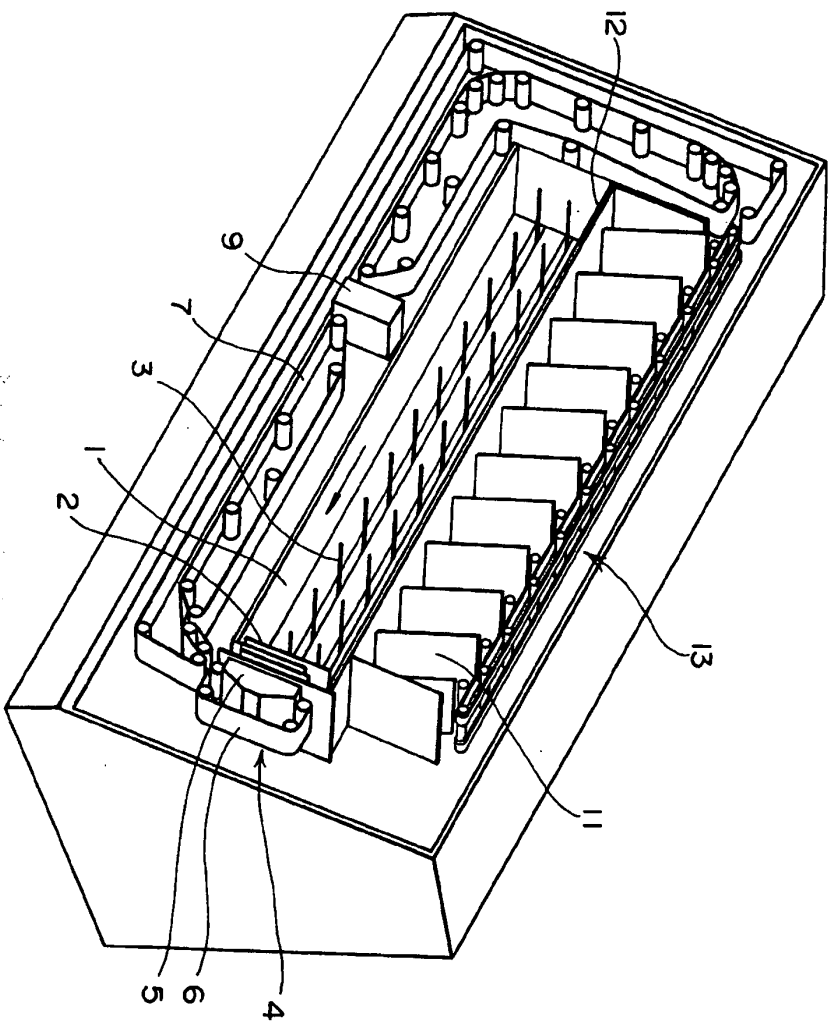
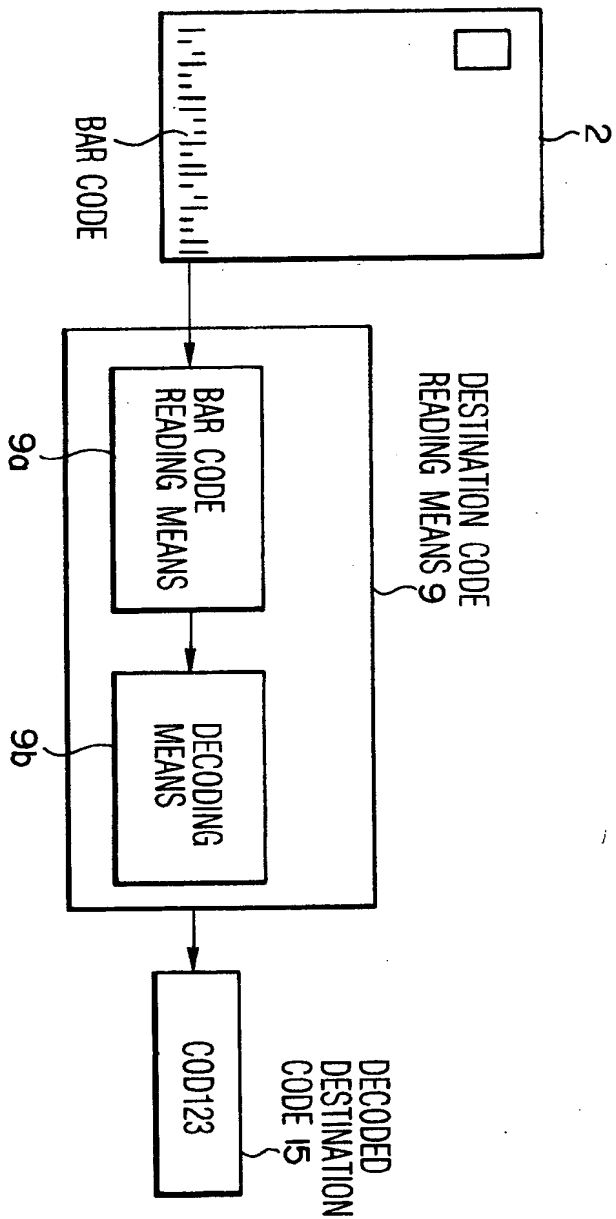


FIG.2



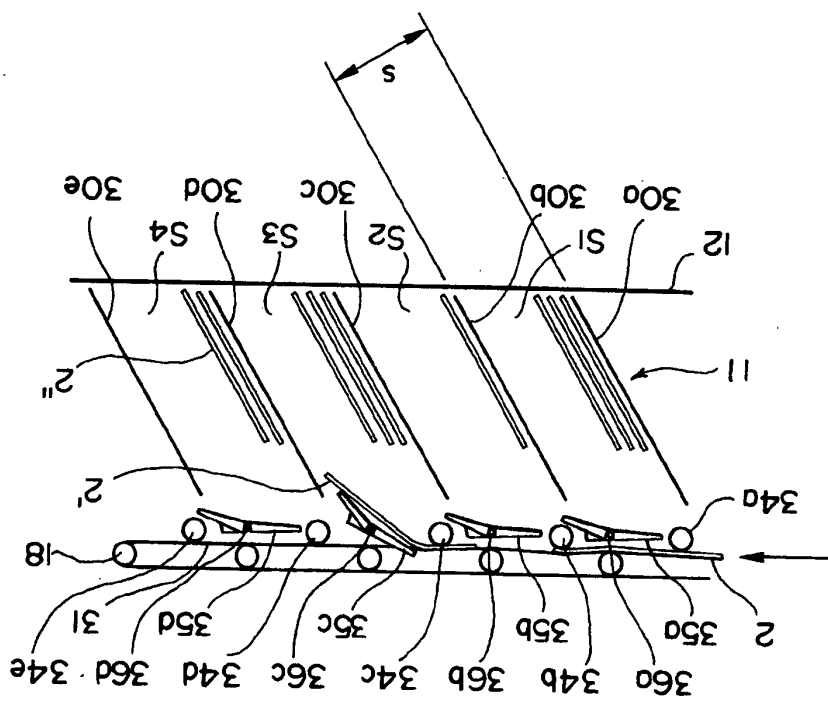


FIG. 3

FIG. 4

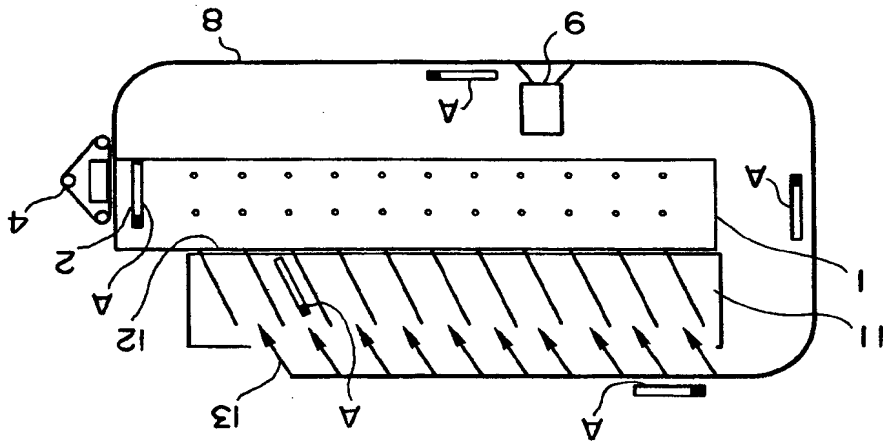


FIG. 5

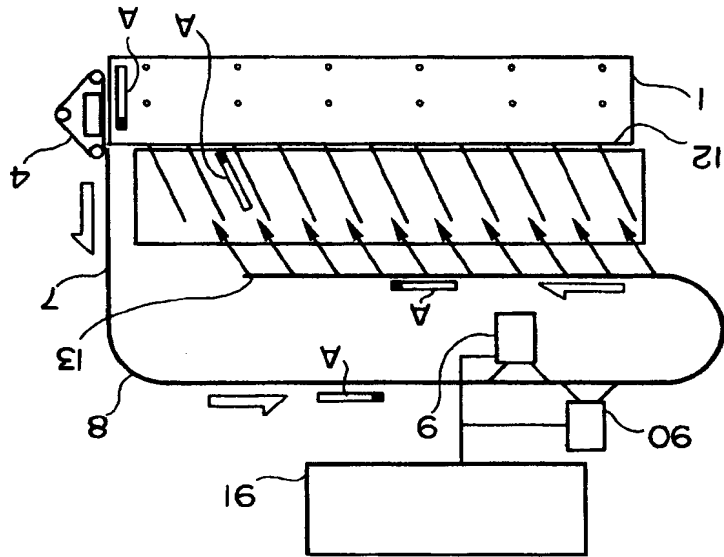
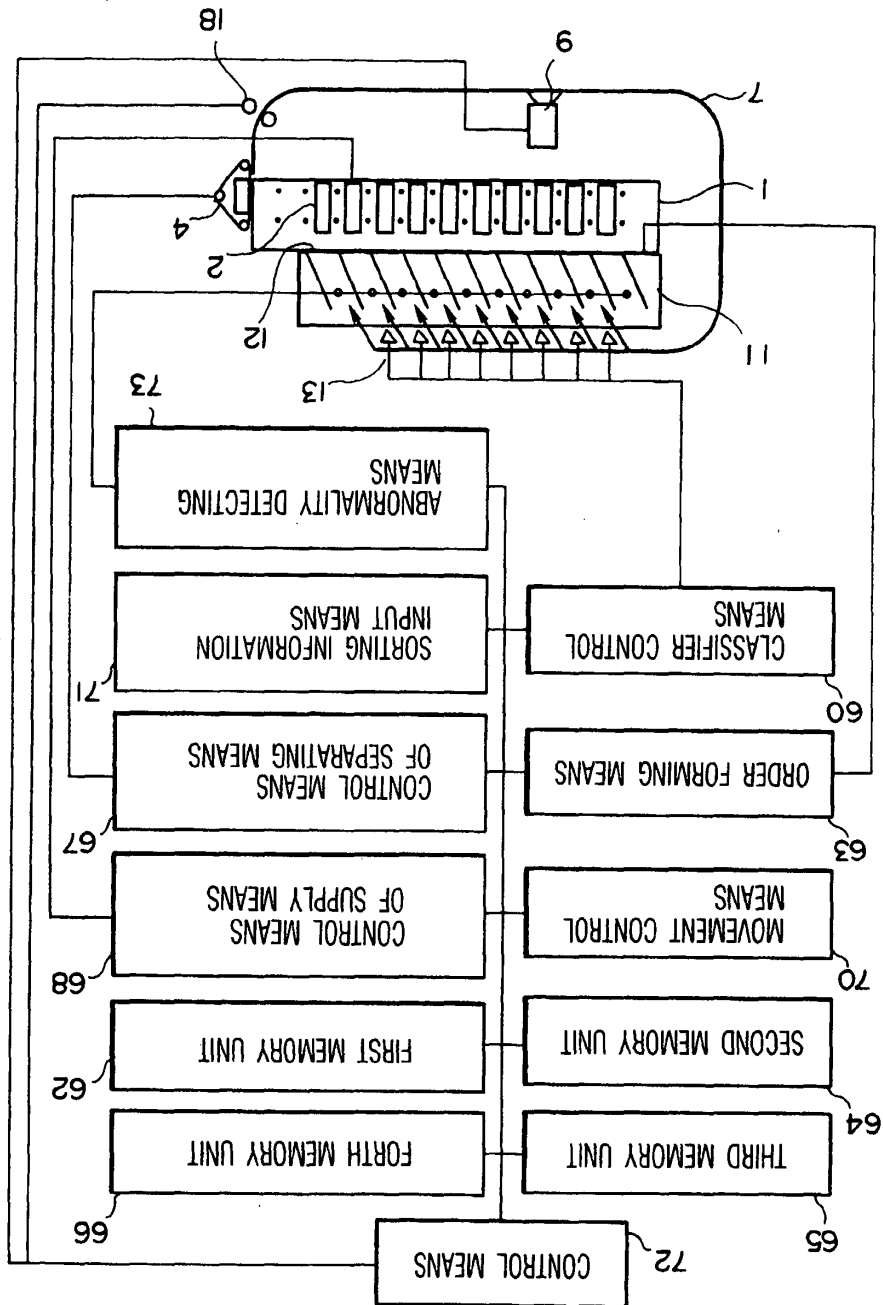


FIG. 6



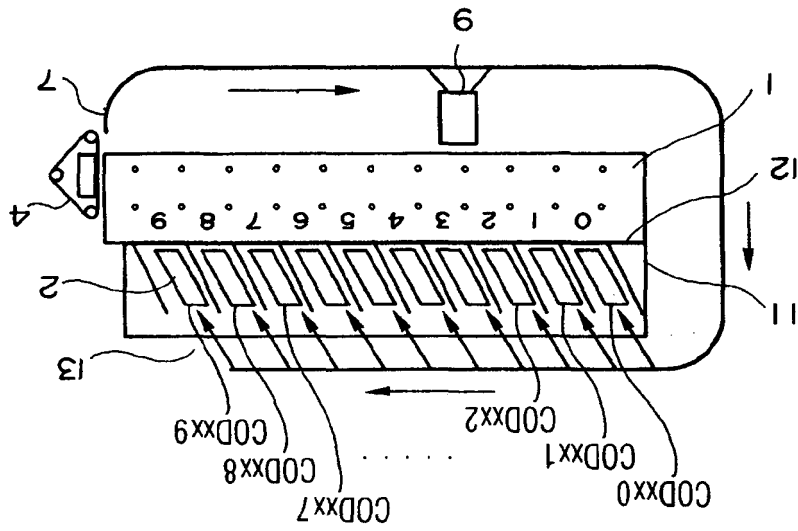


FIG. 8

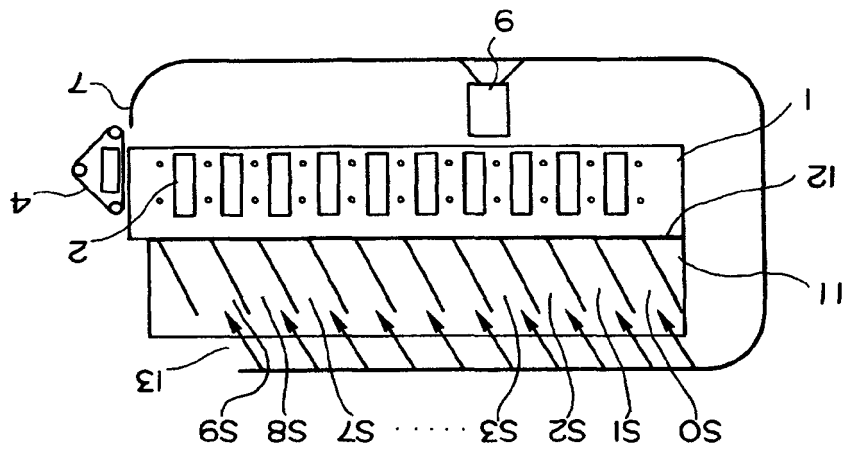


FIG. 7

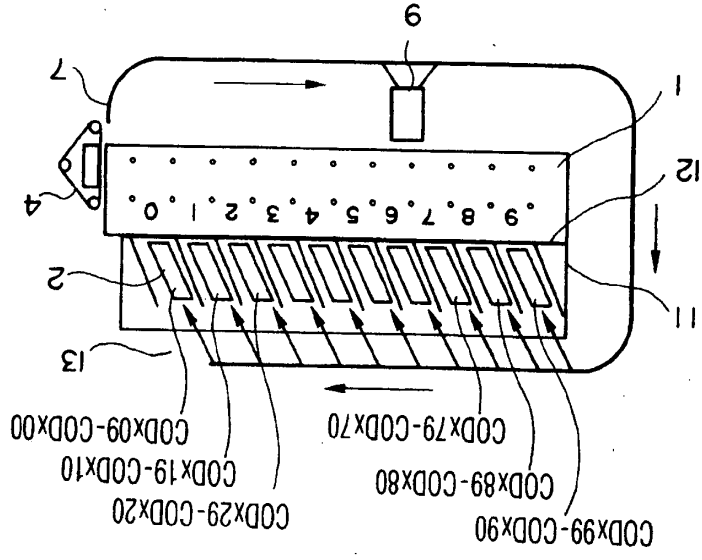


FIG.10

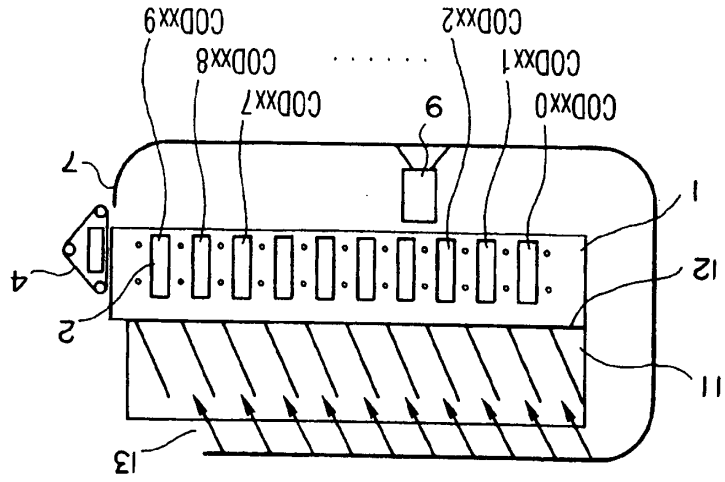


FIG.9

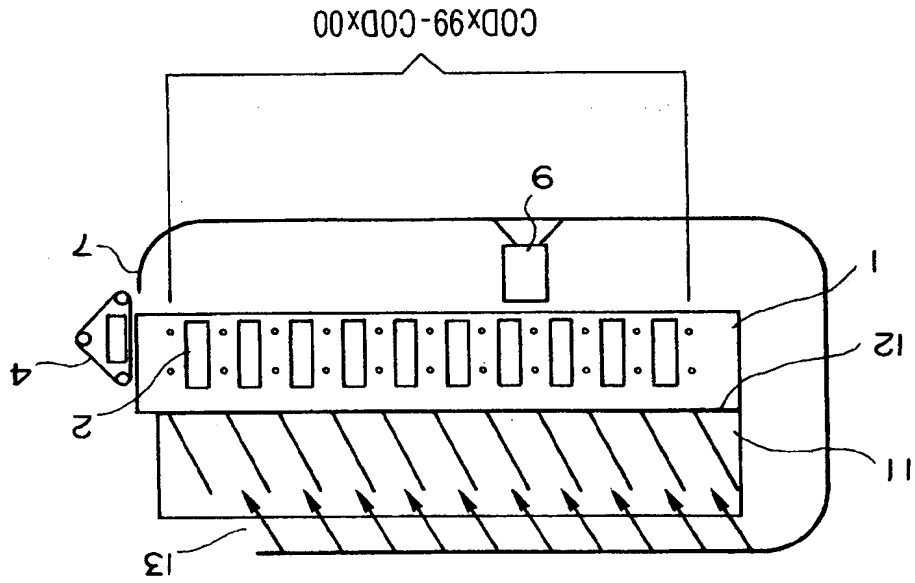


FIG. 11

FIG.12

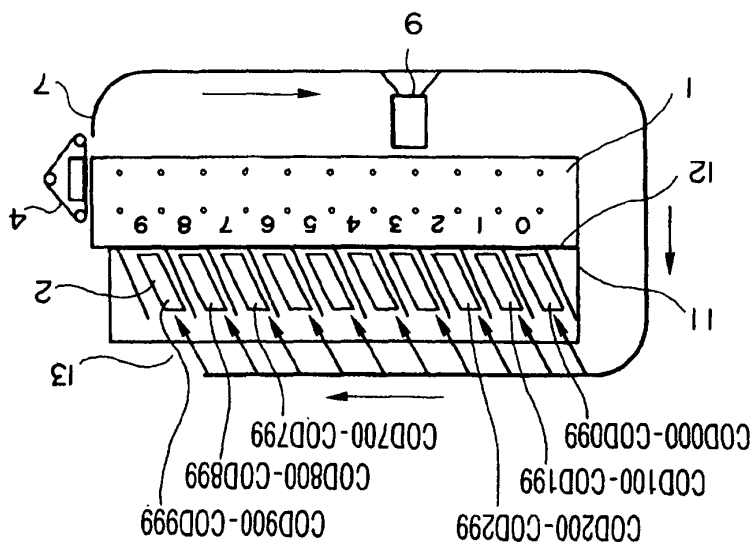


FIG.13

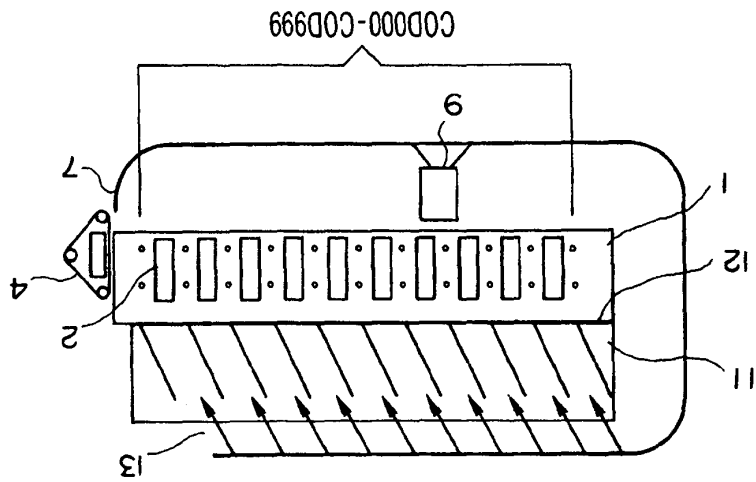


FIG.14

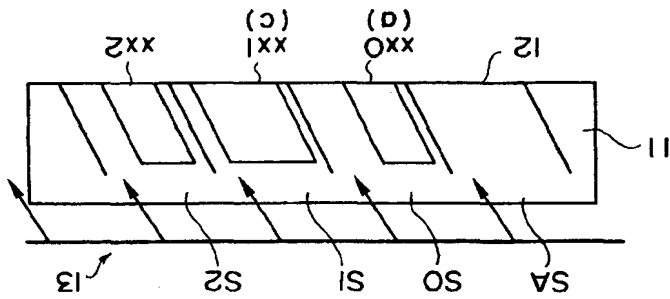


FIG.15

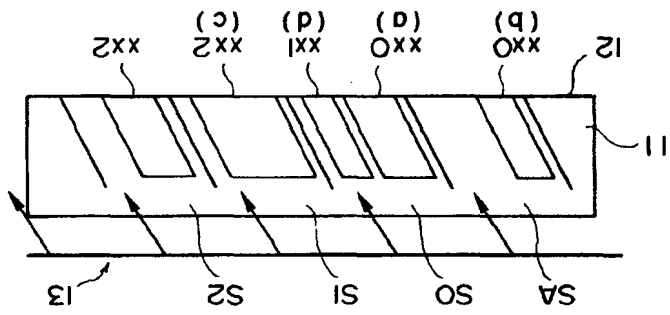
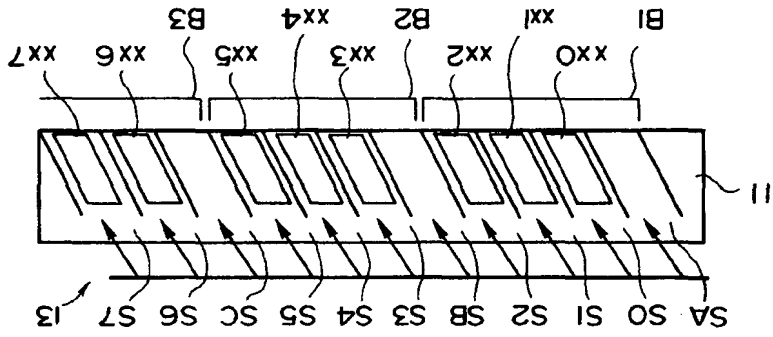


FIG.16



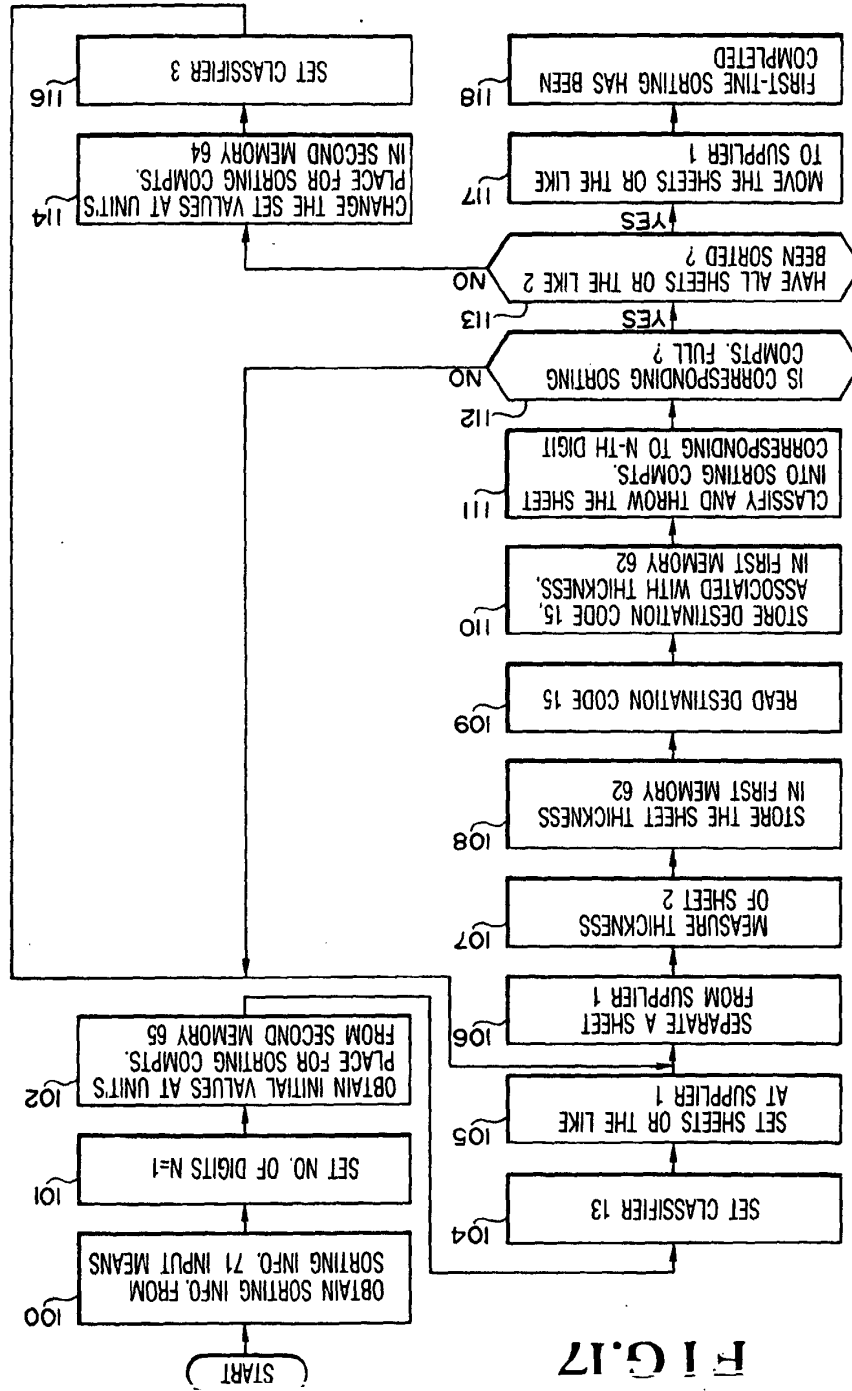
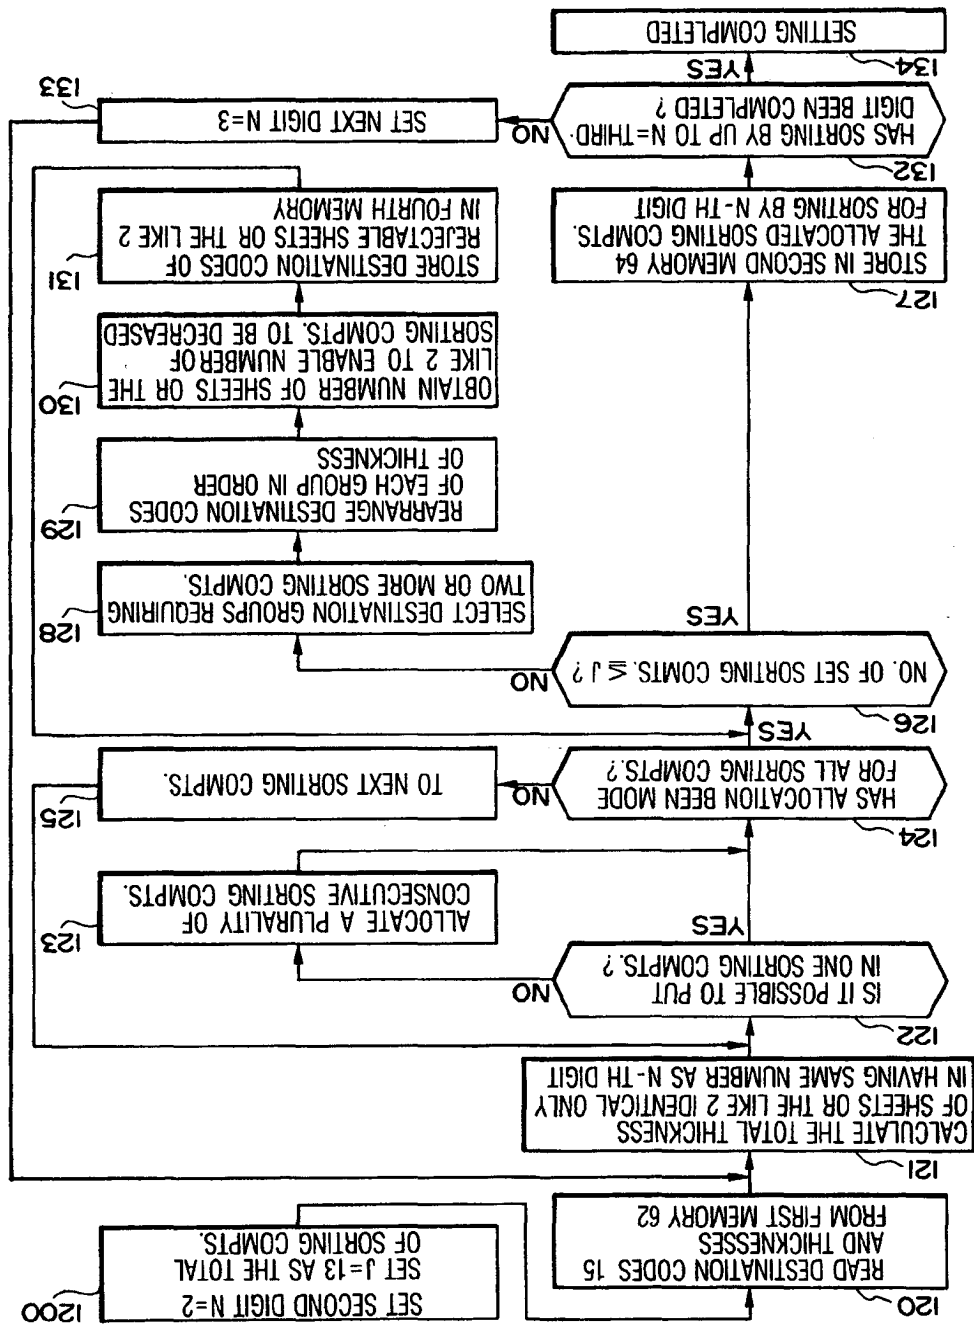


FIG. 18



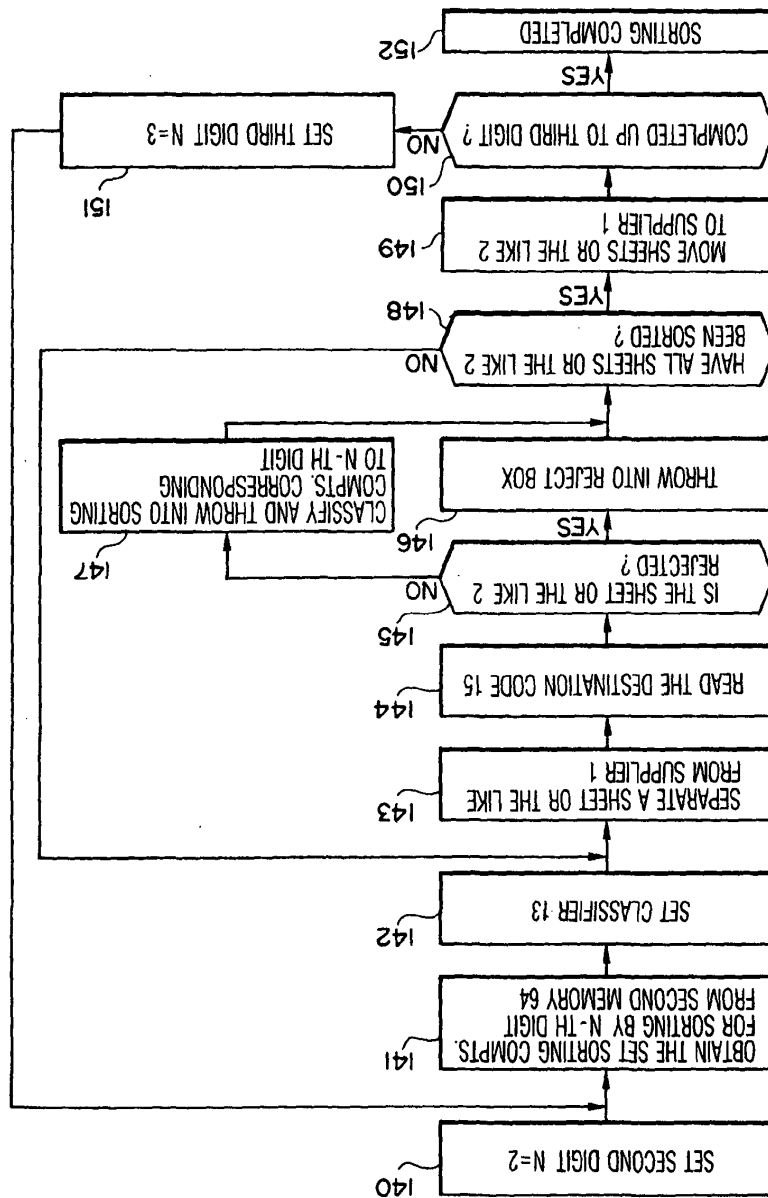


FIG. 19

